




Odorox[®] Boss[™] Hydroxyl Generator Air & Surface Protection

Product Specifications

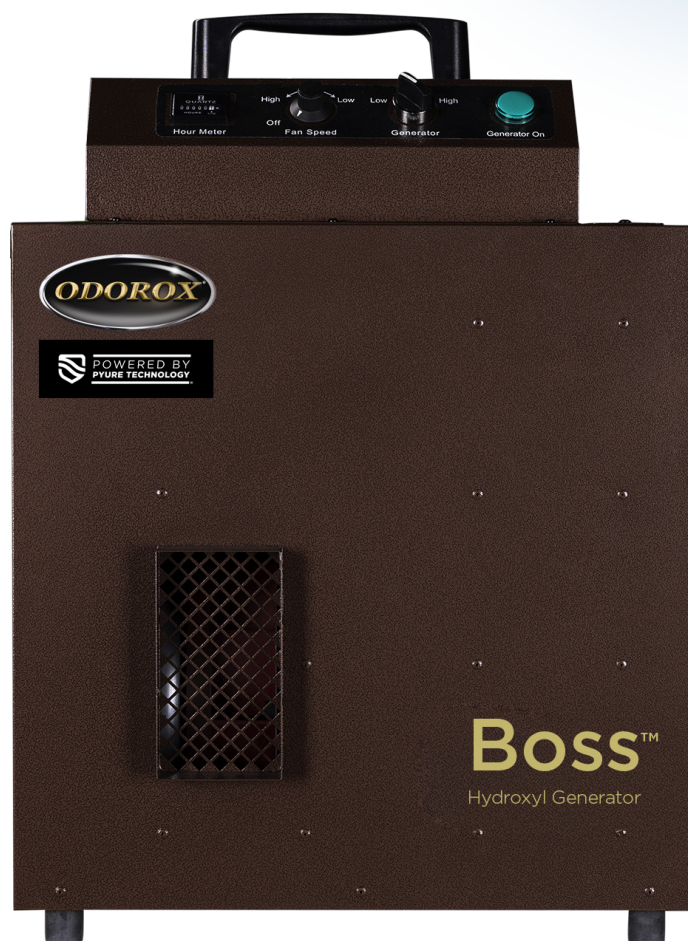

PORTABLE

Boss™ Hydroxyl Generator

The Boss™ hydroxyl generator is designed for larger spaces and environments that require professional cleaning (to purify and deodorize). This portable unit can be used in large offices, retail, senior living and school spaces, and in industrial applications including restoration and remediation following fire or water damage.

The table below summarizes the minimum treatment area in the absence of ventilation, and the treatment area range under typical operating conditions: 3 air changes per hour, 90% recirculated air, and 9 foot (2.7 m) ceilings. If the treated space contains a high contamination or strong odors, the effective treatment area will be smaller than the range listed below. These guidelines should be adhered to for optimal performance and safety.

Operating Guideline

| | |
|---|---|
| Minimum Area (if there is no air circulation) | 1,850 ft ² (171 m ²) |
| Treatment Range | 1,500 – 2,500 ft ² (139 - 232 m ²) |

Specifications

| | |
|---------------------|---|
| Dimensions (LxWxD) | 18.25" x 12.1" x 25.3" (464mm x 308mm x 641mm) |
| Weight | 39lbs (17.7kg) |
| Voltage | 120V @ 60Hz / 230V @ 50Hz |
| Power | 230 Watts (max) |
| Number of Optics | 2 |
| Fan Rating | 110-230 ft ³ /m (186-390 m ³ /h) |
| Airflow* | 180 CFM *Airflows were measured with new/clean units |
| Noise Level | 68-70dBA |
| Filter | Washable filter 9" x 18" x 1" (228.6mm x 457.22mm x 25.4mm) |
| Shipping Dimensions | 22" x 15" x 29.5" (559mm x 381mm x 749mm) |
| Shipping Weight | 44lbs (20.0kg) |
| Certification | UL 507, CSA c22.2 #113, CE, RoHS, REACH |
| Warranty | 2 years covering defects in workmanship or materials, but excluding spare parts and consumables |

Product color may vary.



sales@pyure.com
1.877.735.3701
pyure.com



Copyright 2025, The Pyure Company.
Boss™ is a trademark of The Pyure Company,
Boynton Beach, FL 33426 USA
Document# BOS02LS00A
02/20/2025