




Odorox[®] HRC06[™] Air Curtain Hydroxyl Generator Air & Surface Protection

Product Specifications

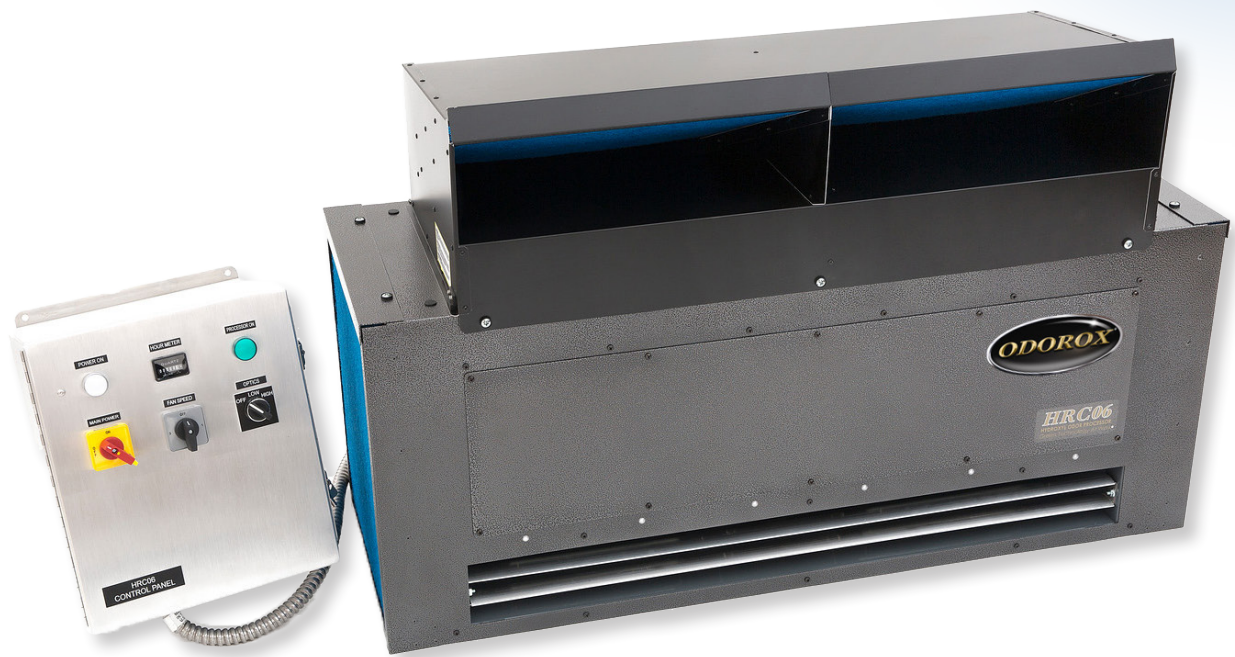

WALL-MOUNTED

HRC06™ Air Curtain

The HRC06™ air curtain is designed for large treatment areas and can modulate hydroxyl output to sanitize and deodorize. This wall-mounted unit can be used in gymnasiums, large commercial spaces, warehouses and industrial applications.

The table below summarizes the minimum treatment area in the absence of ventilation, and the treatment area range under typical operating conditions: 3 air changes per hour, 90% recirculated air and 9-foot (2.7m) ceilings. If the treated space contains high contamination or strong odors, the effective treatment area will be smaller than the range listed below. These guidelines should be adhered to for optimal performance and safety.

Operating Guideline

Minimum Area (if there is no air circulation)	4,012ft ² (373m ²)
Treatment Range	3,400 – 6,500ft ² (316 - 604m ²)

Specifications

Dimensions (LxWxD)	45" x 31" x 29" (1143mm x 787mm x 737mm)
Weight	141lbs (63.95kg)
Voltage	120V @ 60Hz / 230V @ 50Hz
Power	1,200 Watts (max)
Number of Optics	6
Fan Rating	Max. 1,500ft ³ /min (2,548m ³ /h)
Airflow*	1512 CFM, 4000FPM (max) with 36" nozzle *Airflows were measured with new/clean units
Noise Level	60dBA @ 10 feet (3m) from the unit
Filter	2 washable filters 17.75" X 12" X 1" / 2 washable filters 17.75" X 14.75" X 1"
Shipping Dimensions	55" x 23" x 35" (1,397mm x 584mm x 889mm)
Shipping Weight	280lbs (127kg)
Certification	Contact Pyure for specific certification requirements
Warranty	2 years covering defects in workmanship or materials, but excluding spare parts and consumables
Installation	Installation requires an electrician (hard-wired to meet local electrical code)

Distributed by:



sales@pyure.com
1.877.735.3701
pyure.com



Copyright 2023, The Pyure Company.
HRC06™ is a trademark of The Pyure Company,
Boynton Beach, FL 33426 USA
Document# HRC06LS000