

# Pyure IDI03™ ‘BBB’ Unit

The IDI03 unit fits into the ductwork of any air handling system designed to treat the applications of concern. Multiple IDI units can be used to scale up to meet the size of the treatment space and can be mounted directly in the ductwork or in a bypass loop with an Inline Dynamic Enclosure.

## Operating Guideline

Treatment Range	Nominal treatment area
	3,000 sq ft (278 sq m).*

\*Based on a typical office environment: 3 air changes per hour, 90% recirculated air, and 9-foot (2.7 m) ceiling.




## Specifications

Dimensions (LxWxD)	13.7" x 10.5" x 11.8" (346 mm x 266 mm x 300 mm)
Weight	10.0 lbs (4.5 kg)
Shipping Dimensions	16.0" x 16.0" x 16.0" (406 mm x 406 mm x 406 mm)
Shipping Weight	16.0 lbs (7.3 kg)
Voltage	100-240VAC @50/60Hz
Power	160 Watts (nominal)
Velocity	50 - 1,250 ft/min (recommended)
Temperature Range	38° to 185° F (3° to 85° C)
Humidity Range	15 to 95% RH, non-condensing
Number of Optics	3
Certification	UL 1598, CSA C22.2 #250, CE, RoHS, REACH
Warranty	2 years covering defects in workmanship or materials, but excluding consumables

### Product Numbers

00819355021215	IDI03™ Induct ‘BBB’ Hydroxyl Generator [IDI03]
	Includes: IDI Unit IDI Mounting Plate

Dimensions of IDI03 unit.

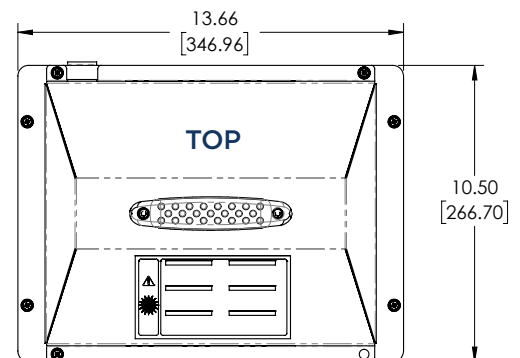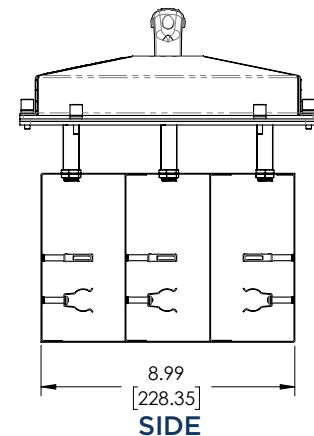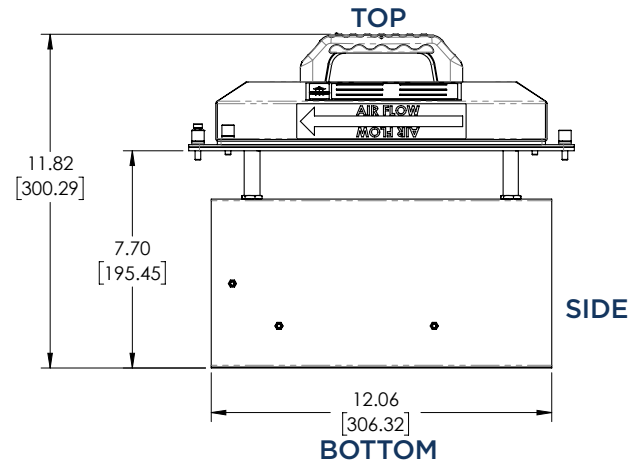

sales@pyure.com

1.877.735.3701 | [pyure.com](https://pyure.com)

Copyright 2023, The Pyure Company.  
IDI™ is a trademark of The Pyure Company,  
Boynton Beach, FL 33426 USA  
Document# IDI03LS010