


# Pyure MVP™ Six Unit IDI™ Controller

The MVP Six Unit Controller is part of the Pyure Dynamic Protection® air and surface purification solution. The controller receives air quality readings from the sensor system and interprets them to modulate the hydroxyl output from the purifier unit(s). The control system has a primary enclosure with an exterior touchscreen display (HMI) on the front cover. It is typically installed as close as possible to the controlled purifier units and at an appropriate height to access the HMI function.

## Specifications



Dimensions (LxWxD) (nominal)	18.0" x 15.0" x 10.0" (458 mm x 391 mm x 250 mm)
Weight	25.0 lbs (11.3 kg)
Shipping Dimensions	20.0" x 18.0" x 12.0" (508 mm x 457.2 mm x 304.8 mm)
Shipping Weight	29.0 lb (13.2 kg)
Voltage options	100 - 120VAC @60Hz /or/ 208 - 240VAC @50/60Hz
Power	1200 Watts (Max)
Channels	6
Sensors	Supports up to 4
Temperature range (operating)	32° to 131° F (0° to 55° C)
Certification	CE, RoHS, REACH
Warranty	2 years covering defects in workmanship or materials, but excluding consumables
Communications Protocols	RJ45 Ethernet (TCP/IP, IPX, Modbus TCP)

Dimensions of MVP six unit IDI controller enclosure.

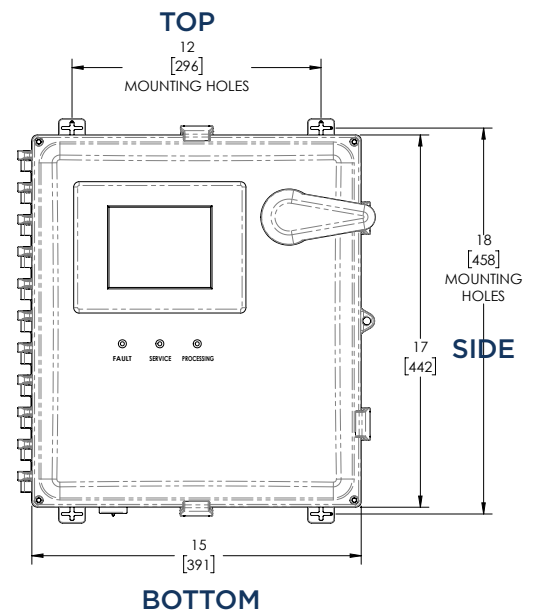

## Product Numbers

00819355021291	MVP™ Six Unit IDx 120V Controller [MVPXX29]
00819355021307	MVP™ Six Unit IDx 230V Controller [MVPXX30]

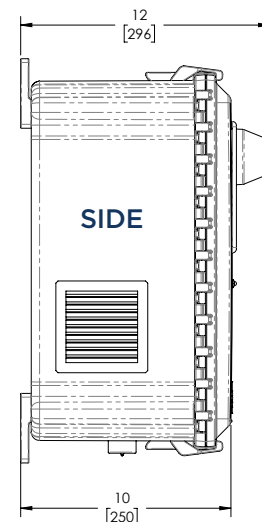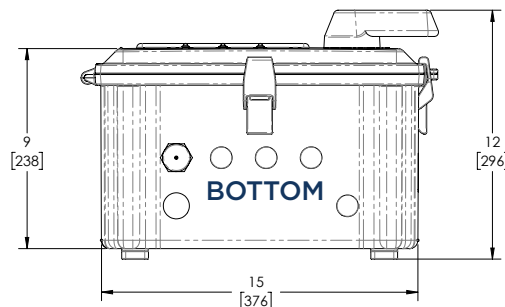

[sales@pyure.com](mailto:sales@pyure.com)

1.877.735.3701 | [pyure.com](http://pyure.com)

Copyright 2023, The Pyure Company.  
MVP™ is a trademark of The Pyure Company,  
Boynton Beach, FL 33426 USA  
Document# MVPXXLS040