


# Pyure Insight™ Edge 2101 Controller, with HMI

The Pyure Insight™ Edge 2101 Controller with HMI is part of the Pyure Dynamic Protection® air and surface purification solution. The controller receives air quality readings from the sensor system and interprets them to modulate the hydroxyl output from the purifier unit(s). The gateway handles all secure network connections to the unit(s). The control system has a primary enclosure with an exterior touchscreen display (HMI) on the front cover. It is typically installed in a clean, conditioned space and at an appropriate height to access the HMI function.

## Specifications



Dimensions (LxWxD)	16.9 x 14.7" x 8.0" (429 mm x 373 mm x 203 mm)
Weight	15.6 lbs (7.1 kg)
Shipping Dimensions	20.0" x 18.0" x 12.0" (508 mm x 457 mm x 305 mm)
Shipping Weight	18.0 lb (8.7 kg)
Voltage options	90 - 246 VAC @50/60Hz
Power	120 Watts
Units	All Pyure controlled products
Sensor	Supports PoE and analog
Temperature range	50° to 122° F (10° to 50° C)
Gateway Certification	CE, EN, FCC, IEC, RCM, REACH, RoHS, UKCA, VCCI, WEEE
Warranty	2 years covering defects in workmanship or materials
Communications Protocols	RJ45 Ethernet (TCP/IP, IPX, Modbus TCP, CIP) RS-485, USB

**Dimensions of Pyure Insight Edge 2101 Controller, with HMI.**

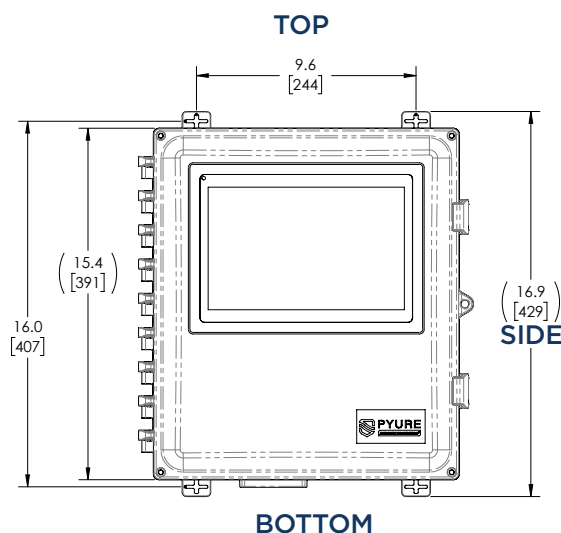

## Product Numbers

00819355022564	Pyure Insight™ Edge 2101, with HMI Controller [INEXX14]
----------------	---

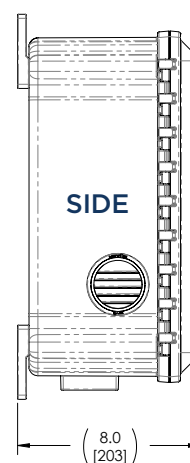

[sales@pyure.com](mailto:sales@pyure.com)

1.877.735.3701 | [pyure.com](https://pyure.com)

Copyright 2024, The Pyure Company.  
Pyure Insight™ is a trademark of The Pyure Company,  
Boynton Beach, FL 33426 USA  
Document# INEXXLS010  
11/08/2024