


# Pyure Insight™ Edge 2100 Controller

The Pyure Insight™ Edge 2100 Controller is part of the Pyure Dynamic Protection® air and surface purification solution. The controller receives air quality readings from the sensor system and interprets them to modulate the hydroxyl output from the purifier unit(s). The gateway handles all secure network connections to the unit(s). It is typically installed in a clean, conditioned space.

## Specifications



Dimensions (LxWxD)	16.9 x 14.7" x 8.0" (429 mm x 373 mm x 203 mm)
Weight	12.5 lbs (5.7 kg)
Shipping Dimensions	20.0" x 18.0" x 12.0" (508 mm x 457 mm x 305 mm)
Shipping Weight	14.8 lb (6.7 kg)
Voltage options	90 - 246 VAC @50/60Hz
Power	120 Watts
Units	All Pyure controlled products
Sensor	Supports PoE and analog
Temperature range	50° to 122° F (10° to 50° C)
Gateway Certification	CE, EN, FCC, IEC, RCM, REACH, RoHS, UKCA, VCCI, WEEE
Warranty	2 years covering defects in workmanship or materials
Communications Protocols	RJ45 Ethernet (TCP/IP, IPX, Modbus TCP, CIP) RS-485, USB

## Dimensions of Pyure Insight Edge 2100 Controller.

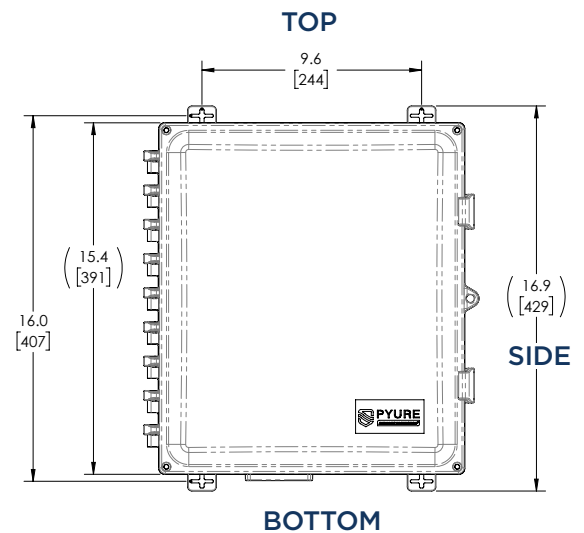

## Product Numbers

00819355022557	Pyure Insight™ Edge 2100 Controller [INEXX12]
----------------	--

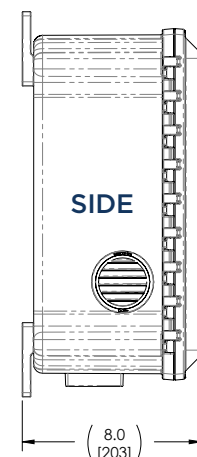

[sales@pyure.com](mailto:sales@pyure.com)

1.877.735.3701 | [pyure.com](http://pyure.com)

Copyright 2024, The Pyure Company.  
Pyure Insight™ is a trademark of The Pyure Company,  
Boynton Beach, FL 33426 USA  
Document# INEXXLS120  
11/08/2024