


Pyure Insight™ Edge 1100 Gateway

The Pyure Insight™ Edge 1100 Gateway handles all secure network communications. It is typically installed in a clean, conditioned space .

Specifications



Dimensions (LxWxD)	16.9" x 14.7" x 8.0" (429 mm x 373 mm x 203 mm)
Weight	12.5 lbs (5.7 kg)
Shipping Dimensions	20.0" x 18.0" x 12.0" (508 mm x 457 mm x 305 mm)
Shipping Weight	14.8 lb (6.7 kg)
Voltage options	90 - 246 VAC @50/60Hz
Power	120 Watts
Units	All Pyure controlled products
Sensor	Supports PoE or analog
Temperature range	50° to 122° F (10° to 50° C)
Gateway Certification	CE, EN, FCC, IEC, RCM, REACH, RoHS, UKCA, VCCI, WEEE
Warranty	2 years covering defects in workmanship or materials
Communications Protocols	RJ45 Ethernet (TCP/IP, IPX, Modbus TCP, CIP) RS-485, USB

Dimensions of Pyure Insight Edge 1100 Gateway.

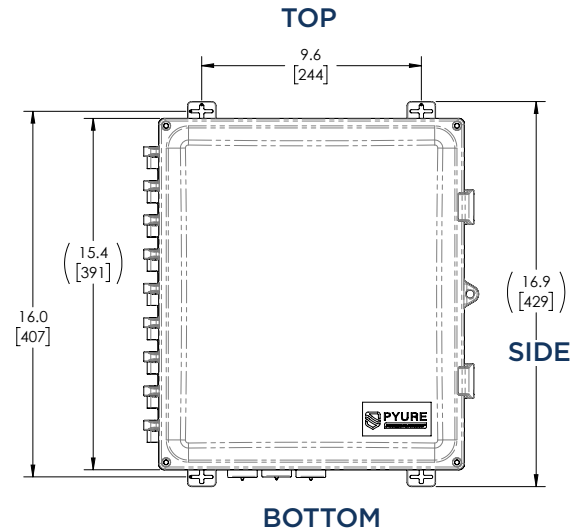

Product Numbers

00819355022380	Pyure Insight™ Edge 1100 - Gateway [INEXX16]
----------------	---

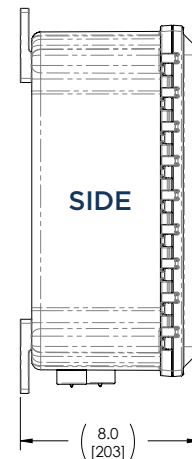

sales@pyure.com

1.877.735.3701 | pyure.com

Copyright 2024, The Pyure Company.
Pyure Insight™ is a trademark of The Pyure Company,
Boynton Beach, FL 33426 USA
Document# INEXXLS160
09/10/2024