

Pyure MVP14™ Interconnect Cable

An MVP14 Interconnect Cable is required to connect every MVP14™ unit to the MVP14™ controller. The cable comes as an assembly with connectors and multiple lengths to handle different distances between the MVP14 unit(s) and the MVP14 Controller.


Specifications

Dimensions (LxWxD)	See below
Weight	0.4 lbs (0.2 kg) per ft
Shipping Dimensions (nominal based on 150 ft)	22.0" x 16.0" x 30.0" (559 mm x 406 mm x 762 mm)
Shipping Weight (nominal based on 150 ft)	62.0 lbs (30.5 kg)
Insulation	0.022" Wall, Nom PVC
Temperature range	-40F to 194F (static) / 23F to 194F (dynamic) (-40C to 90C (static) / -5C to 90C (dynamic))
Bend radius	0.405"
Pull tension	196 lbs (Max)
Voltage rating	600 Vrms
Capacitance	24pF/ft @ 1kHz, Nominal conductor to conductor
Inductance	0.21 uH/ft, Nominal
Conductor DCR	10.9 ohm/1000ft @ 20C, Nominal
Cable Certifications	UL AWM/STYPEL 2587 (90C / 600Vrms) CSA International C(RU) AWM I/II A/B (90C / 600Vrms) CE EU Low Voltage Directive 2014/35/EU CE EU Directive 2011/65/EU(RoHS2), EU Directive 2015/863/EU (RoHS3) REACH Regulation (EC 1907/2006)

Product Numbers

00819355020058	MVP14™ Interconnect 50 ft Cable [MVP14DD35]
00819355020089	MVP14™ Interconnect 150 ft Cable [MVP14GG35]

Dimensions of MVP14 Interconnect Cable.

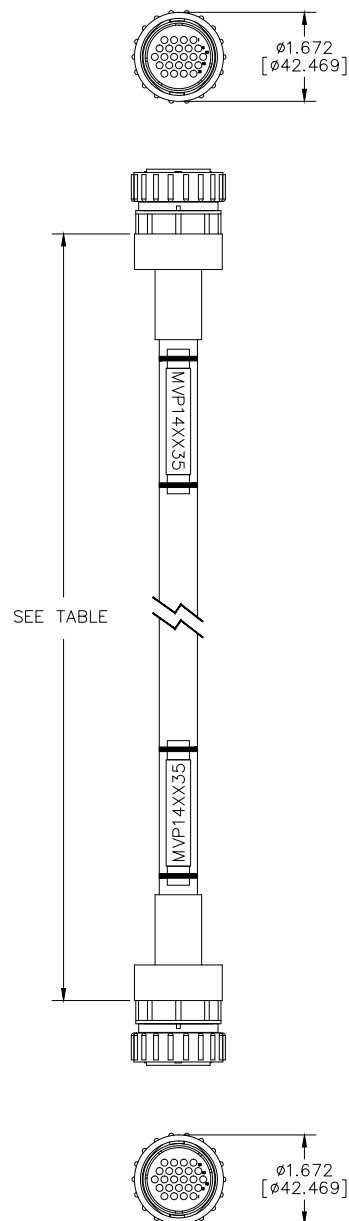

sales@pyure.com

1.877.735.3701 | pyure.com

Copyright 2023, The Pyure Company.
MVP™ is a trademark of The Pyure Company,
Boynton Beach, FL 33426 USA
Document# MVP14LS070