

Pyure MVP™ Main Disconnect

The MVP Main Disconnect is an optional local power disconnect with Interlock to the IDI™ and MVP units.

Note: Some facilities will supply a local power disconnect to the unit(s).




Specifications

Dimensions (LxWxD)	12.31" x 10.66" x 8.17" (313 mm x 271 mm x 208 mm)
Weight	5.8 lbs (2.6 kg)
Shipping Dimensions	12.0" x 12.0" x 9.0" (305 mm x 305 mm x 229 mm)
Shipping Weight	6.5 lb (3.0 kg)
Voltage	600VAC (Max)
Power	25A (Max)
Temperature range	-40° to 150° F (-40° to 65° C)
Certification	IP20, IP65, RoHS3 Compliant
Warranty	2 years covering defects in workmanship or materials, but excluding consumables

Product Numbers

00819355021482	MVP™ Main Disconnect [MVPXX41]
----------------	--------------------------------

Dimensions of MVP Main Disconnect enclosure.

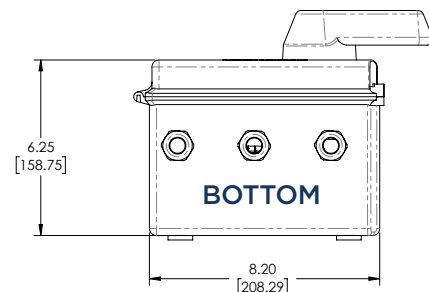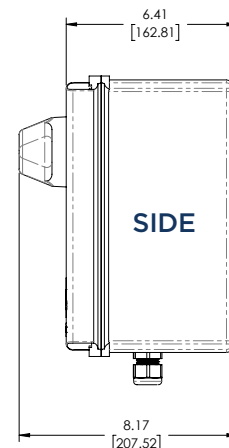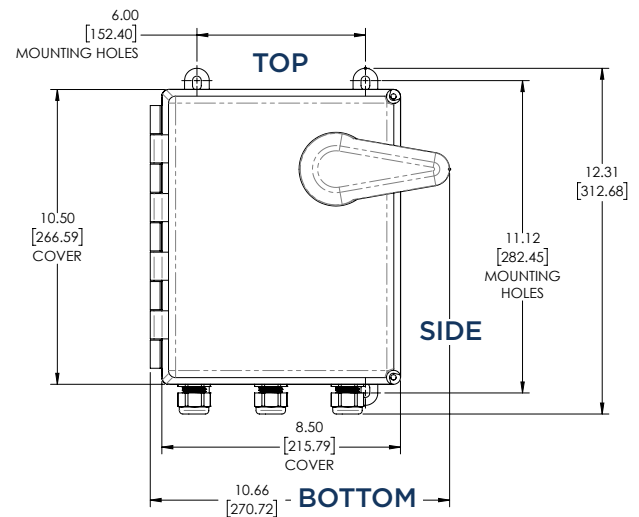

sales@pyure.com

1.877.735.3701 | pyure.com

Copyright 2024, The Pyure Company.
MVP™ & IDI™ are trademarks of The Pyure Company,
Boynton Beach, FL 33426 USA
Document# MVPXXLS060