

Pyure Mini™ 25 & 50

Quick Start Guide



Need Support?

Contact our support team

+1 (877) 735-3701 sales@pyure.com

Treatment Range	
Pyure Mini™ 25	Pyure Mini™ 50
80 - 250 sq ft (8 - 23 sq m)	250 - 500 sq ft (23 - 46 sq m)
The table above summarizes the treatment area under typical operating conditions: 3 air changes per hour, 90% recirculated air, and 9 foot (2.7 m) ceiling. For use within the treatment range only.	


Safety First

Check Power Source Keep Away From Water and Wet Hands • To avoid fire or shock hazard, plug the purifier · To protect against electrical hazards, directly into a grounded AC electrical outlet. DO NOT immerse in water or other liquids. DO NOT use near water. • DO NOT plug the cord in with wet hands: electric shock could result. Place on a Clear, Hard, Flat Surface **Check for Damage** · Remove all packaging material before use. • DO NOT operate the purifier with a damaged cord or plug, if motor fan fails to rotate, after the purifier · Keep the cord out of heavy traffic areas. malfunctions, if it has been dropped or damaged • NEVER block the air openings, grills/outlets or place in any manner. Return purifier to manufacturer or on a soft surface such as a bed or sofa, as this could authorized repair facility for examination, electrical or cause the unit to tip over, blocking the Air Intake mechanical adjustment, or repair. Opening/Grill.

CAUTION: for general ventilating use only. DO NOT use to exhaust hazardous or explosive materials and vapors.

Instruction for Use

- 1. Place the unit on a flat, level surface.
- 2. Plug the unit into a standard power outlet.
- 3. Press the opower button to start.
- 4. Use the / buttons to increase or decrease fan speed.
- 5. Use the button to dim the intensity of the blue light.*
- * LED light is aesthetic only and not the UV Optic.

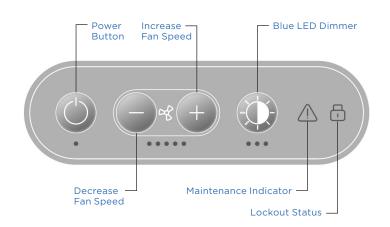

For the Owner's Manual, product warranty registration, and to order replacement parts, visit:

www.pyure.com/owner or scan the QR code.

